

# DHI-HCVR4104/08C-S3

4/8 Channel Tribrid 720P Smart 1U Digital Video Recorder



- Embedded processor
- Support HDCVI/CVBS video inputs
- Max 5/10 channels IP camera inputs
- Max 20/40Mbps Incoming Bandwidth
- Long transmission distance over coax cable
- Support 1 SATA HDD, up to 6TB



## System Overview

Dahua newest generation digital video recorder adopts HDCVI technology, our in-house technology is an over-coaxial-cable analog HD video transmission standard, allowing long-distance HD transmission at a lower cost to meet the requirements for a complex and large installation. It supports up to 8 channels of HDCVI/CVBS inputs, and 2 channels IP camera additionally.

Designed as a low-cost, easy installation product, this HCVR is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education. It is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and is compatible with ONVIF 2.4.1.

## Functions

5MP Resolution(DHI-HCVR4108C-S3)

The HCVR supports 5MP HD resolution (2560 x 1920) for recording, live viewing.

### Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

### P2P

Monitor at anytime and anywhere.

Easily and conveniently manage the device.

## Technical Specification

### System

Main Processor	Embedded Processor
Operating System	Embedded LINUX

### Display

Interface	1 HDMI ,1 VGA
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768
Multi-screen Display	4CH: 1/4/6 8CH: 1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording

### Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss and Tampering
Alarm input	--
Relay Output	--
Tracking Trigger Event	--

### Playback and Backup

Playback	4CH: 1/4 8CH:1/4/9
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

### Storage

Internal HDD	1 SATA Port, up to 6TB capacity
HDD Mode	Single
eSATA	--

### Auxiliary Interface

USB	2 Ports (2 USB 2.0)
RS232	--

### Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
---------------------	---

## Audio and Video

HDCVI Camera Input	4/8 Channel
IP Camera Input	4+1 Channel,each channel up tp 2MP 8+2 Channel, each channel up to 5MP
Audio In/Out	1/1
Two-way Talk	Reuse audio in/out, RCA

## Recording

Compression	H.264
Resolution	1080N, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Record Rate	Main stream: 4CH:1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps) 8CH:1080N(12fps)/720P(15fps)/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps) Sub stream:4CH:CIF/QCIF(1~15fps) 8CH:CIF/QCIF(1~7fps)
Bit Rate	1Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec

## Network

Interface	1 RJ-45 Port (100M)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE,DDNS, FTP, Alarm Server, P2P,IP Search (Support Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 2.4.1, CGI Conformant

## Electrical

Power Supply	DC12V/2A
Power Consumption	<15W (Without HDD)

## Environmental

Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 86 ~ 106kpa
Storage Conditions	0°C ~ +50°C (+32°F ~ +122°F), 0 ~ 90% RH

## Construction

Dimensions	Smart 1U, 205×211×45mm (8.1"×8.3"×1.8")
Net Weight	0.5kg (1.1lb) (without HDD)
Gross Weight	1kg (2.2lb)
Installation	Desktop installation




## Certifications

Certifications	FCC: Part 15 Subpart B ICES 003 Issue 6
	CE: EN 55032: 2012+AC:2013 (Class B) EN 55024 : 2010 EN 61000-3-2 : 2014 EN 50130-4: 2011 EN 61000-3-3 : 2013
	UL: 60950-1 and CAN/CSA C22.2 No. 60950-1-07

Ordering Information


Type	Part Number	Description
4/8 Channel HCVR	DHI-HCVR4104C-S3	4 Channel Tribrid 720P Smart 1U Digital Video Recorder
	DHI-HCVR4108C-S3	8 Channel Tribrid 720P Smart 1U Digital Video Recorder

Dimensions (mm)



Rear Panel

DHI-HCVR4104C-S3

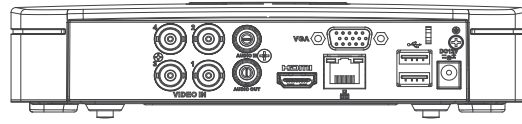

DHI-HCVR4108C-S3

