

## DH-NVR5408-8P/5416-8P/5432-8P

### 8/16/32 Channel 1.5U 8PoE Network Video Recorder



### Features

- > Up to 8/16/32 channel with 1080P realtime live view
- > H.264/MJPEG dual codec decoding
- > Up to 5MP resolution
- > Max 160Mbps incoming bandwidth
- > HDMI/VGA simultaneous video output
- > 8/16/16 channel synchronous realtime playback, GRID interface
- > 8/16/32 channel synchronous realtime preview, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc.
- > ONVIF Version 2.0 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 4 SATA HDDs up to 16TB, 1 eSATA up to 16TB, 3 USB2.0
- > Support IPC UPnP, 8 PoE ports
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

# DH-NVR5408-8P/5416-8P/5432-8P


## Technical Specifications

Model	DH-NVR5408-8P	DH-NVR5416-8P	DH-NVR5432-8P
<b>System</b>			
Main Processor	Dual-core embedded processor		
Operating System	Embedded LINUX		
<b>Video &amp; Audio</b>			
IP Camera Input	8 channel	16 channel	32 channel
Two-way Talk	1 channel Input, 1 channel Output, BNC		
<b>Display</b>			
Interface	1 HDMI, 1 VGA, 1TV		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split	1/4/8/9	1/4/8/9/16	1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
<b>Recording</b>			
Compression	H.264 / MJPEG		
Resolution	5MP(2560×1920) / 3MP(2048×1536) / 1080P(1920×1080) / 720P(1280×720) / D1(704×576/704×480) & etc.		
Record Rate	Max 128Mbps ( eg. 16ch 5MP@8Mbps, 32ch 1080P@4Mbps & etc.)		
Bit Rate	48~ 8192kbps		
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop		
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
<b>Video Detection &amp; Alarm</b>			
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input	8 channel	16 channel	16 channel
Relay Output	3 channel	6 channel	
<b>Playback &amp; Backup</b>			
Sync Playback	1/4/9	1/4/9/16	1/4/9/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device / eSATA Device / Internal SATA burner/ Network		
<b>Network</b>			
Ethernet	1 RJ-45 port (10/100/1000Mbps)		
PoE	8 ports (IEEE802.3af)		
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)		
Max. User Access	20 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
<b>Storage</b>			

## DH-NVR5408-8P/5416-8P/5432-8P

Internal HDD	4 SATA ports (4HDDs or 3HDDs+1CD/DVD-RW), up to 16TB, Raid (redundancy)
External HDD	1 eSATA port (Max 4 SATA HDDs), up to 16TB
<b>Auxiliary Interface</b>	
USB	3 ports (2 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
<b>General</b>	
Power Supply	AC 100V~240V, 50/60Hz
Power Consumption	NVR: 40W (without HDD) PoE: Max 15W (each)
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa
Dimension (W×D×H)	1.5U, 440mm×460mm×68mm
Weight	5KG (without HDD)

### System Connection

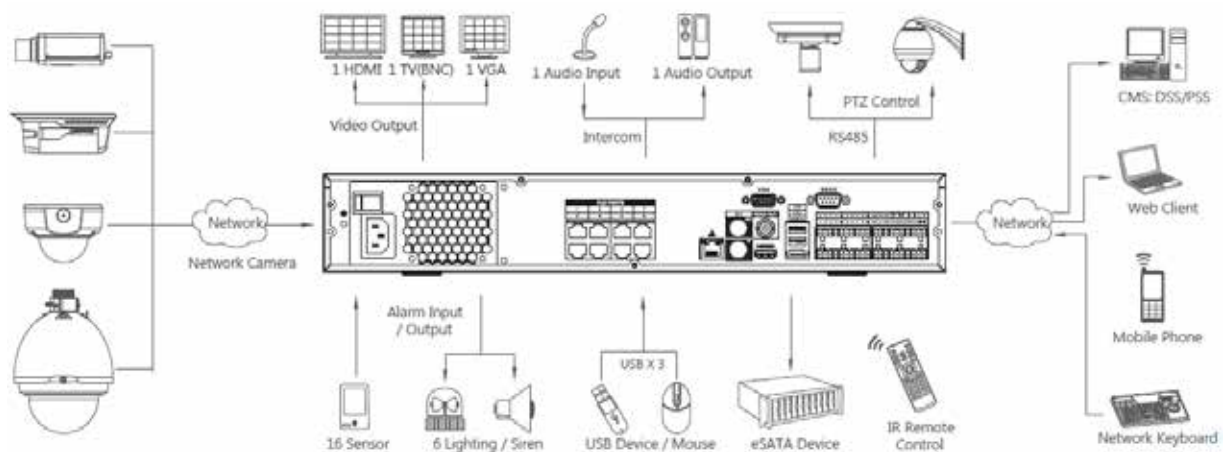

\* Take NVR5432-8P as an example

www.simattelecom.com

**Dahua Technology Co., Ltd**

1199 BinAn Road, Binjiang District, Hangzhou, China

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology

